

HIKVISION®



KATALOG RETAIL **2022**

www.hikvision.com

Kamera Analog

Seri **DOT**



DS-2CE16D0T-EX1PF

- 2MP CMOS Sensor, 1pcs EXIR LEDs, 20m IR,
- Outdoor EXIR Bullet, ICR, 0.02 Lux/F1.2, 12 VDC, Smart IR, DNR, IP66, 2.8/3.6mm Lens,
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE76D0T-EX1PF

- 2MP CMOS Sensor, 1pcs EXIR LEDs, 20m IR,
- Outdoor EXIR Bullet, ICR, 0.02 Lux/F1.2, 12 VDC, Smart IR, DNR, 2.8/3.6mm Lens,
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE16D0T-ITPF

- HD1080p, 2MP CMOS Sensor, EXIR 25m IR,
- Outdoor EXIR Bullet, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, OSD Menu (Up the Coax), IP67, 2.8/3.6/6mm Lens,
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE76D0T-ITPF

- HD1080p, 2MP CMOS Sensor, EXIR 20m IR,
- Outdoor EXIR Turret, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, DNR, OSD Menu (Up the Coax), 2.8/3.6/6mm Lens,
- Support TVI/AHD/CVI/CVBS video signal output

TURBO HD X



DS-2CE12DFT-PIRXOF

- 2M Smart FSI CMOS Sensor,
- Outdoor Bullet, 0.0005Lux/F1.0, 0 Lux with Friendly Lighting, 40m, 3D DNR, 12 VDC, OSD Menu (Up the Coax), 130dB True WDR, IP67, 3.6/6mm Lens,
- 24H Color, PIR Detection, Blue&Red Light Alarm, Built in Siren, Alarm Out
- Support TVI/AHD/CVI/CVBS video signal output
- Alarm

ColorVu
Series camera



DS-2CE72DFT-PIRXOF

- 2M Smart FSI CMOS Sensor,
- Outdoor Turret, 0.0005Lux/F1.0, 0 Lux with Friendly Lighting, 20m, 3D DNR, 12 VDC, OSD Menu (Up the Coax), 130dB True WDR, IP67, 3.6/6mm Lens,
- 24H Color, PIR Detection, Blue&Red Light Alarm, Built in Siren, Alarm Out
- Support TVI/AHD/CVI/CVBS video signal output
- Alarm

ColorVu
Series camera



24 Hours × 7 Colorful Imaging

HIKVISION®

Kamera ColorVu

Berwarna Setiap Waktu



Lensa terdepan

F1.0 Super Aperture

Mengumpulkan lebih banyak cahaya untuk menghasilkan gambar yang lebih cerah



Pencahayaan yang Ramah

Dalam lingkungan tanpa cahaya, ColorVu memiliki cahaya tambahan untuk menjamin gambar tetap berwarna



Sensitifitas Tinggi

Teknologi sensor canggih yang dapat memanfaatkan cahaya yang tersedia dengan jauh lebih baik



ColorVu
Series camera

DS-2CE10HFT-F

- 5MP BSI CMOS Sensor, 5MP@20fps, 4MP@25fps(P)/30fps(N)(Default),
- Outdoor Bullet, 0.0005Lux/F1.0, 0 Lux with Friendly Lighting, 20m, 3D DNR, 12 VDC, OSD Menu(Up the Coax), 130dB True WDR,
- IP67, 3.6/6mm Lens, 24H Color, Support TVI/AHD/CVI/CVBS video signal output



ColorVu
Series camera

DS-2CE72HFT-F

- 5MP BSI CMOS Sensor, 5MP@20fps, 4MP@25fps(P)/30fps(N)(Default),
- Outdoor Turret, 0.0005Lux/F1.0, 0 Lux with Friendly Lighting, 20m, 3D DNR, 12 VDC, OSD Menu(Up the Coax), 130dB True WDR, IP67, 3.6/6mm Lens, 24H Color
- Support TVI/AHD/CVI/CVBS video signal output



ColorVu
Series camera

DS-2CE12HFT-F

- 5MP BSI CMOS Sensor, 5MP@20fps, 4MP@25fps(P)/30fps(N)(Default),
- Outdoor Bullet, 0.0005Lux/F1.0, 0 Lux with Friendly Lighting, 40m, 3D DNR, 12 VDC, OSD Menu(Up the Coax), 130dB True WDR, IP67, 3.6/6mm Lens, 24H Color
- Support TVI/AHD/CVI/CVBS video signal output

16:9

Kamera Turbo HD 3K dengan
video output **ColorVu**
untuk layar lebih lebar



Down to
0.001 lux
@ (F1.0, AGC ON)

View in **Color**
Even in Darkness

2960
1665
Resolution

3K
COLORVU
DENGAN AUDIO

*Tidak ada distorsi selama pratinjau atau pemutaran video karena definisi monitor dipasaran biasanya 16:9



DS-2CE10KF0T-FS

- 3K, 5MP 16:9, CMOS Sensor, 3K @ 20 fps (Default),
- Outdoor Bullet, 0.001Lux/F1.0, 0 Lux with white Light, 20m, 2D DNR, Built-in Mic, Audio up Coaxial (Only TVI), 12 VDC, OSD Menu (Up the Coax), IP67, 3.6/6mm Lens, 24H Color
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE72KF0T-FS

- 3K, 5MP 16:9, CMOS Sensor, 3K @ 20 fps (Default),
- Outdoor Turret, 0.001Lux/F1.0, 0 Lux with white Light, 40m, 2D DNR, Built-in Mic, Audio up Coaxial (Only TVI), 12 VDC, OSD Menu (Up the Coax), IP67, 3.6mm Lens, 24H Color
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE70KF0T-MFS

- 3K, 5MP 16:9, CMOS Sensor, 3K @ 20 fps (Default),
- Outdoor Turret, 0.001Lux/F1.0, 0 Lux with white Light, 20m, 2D DNR, Built-in Mic, Audio up Coaxial (Only TVI), 12 VDC, OSD Menu (Up the Coax), IP67, 3.6mm Lens, 24H Color
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE10KF0T-PFS

- 3K, 5MP 16:9, CMOS Sensor, 3K @ 20 fps (Default),
- Outdoor Bullet, 0.001Lux/F1.0, 0 Lux with white Light, 20m, 2D DNR, Built-in Mic, Audio up Coaxial (Only TVI), 12 VDC, OSD Menu (Up the Coax), IP67, 3.6mm Lens, 24H Color
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE12KF0T-FS

- 3K, 5MP 16:9, CMOS Sensor, 3K @ 20 fps (Default),
- Outdoor Bullet, 0.001Lux/F1.0, 0 Lux with white Light, 40m, 2D DNR, Built-in Mic, Audio up Coaxial (Only TVI), 12 VDC, OSD Menu (Up the Coax), IP67, 3.6 Lens, 24H Color
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE70KF0T-PFS

- 3K, 5MP 16:9, CMOS Sensor, 3K @ 20 fps (Default),
- Indoor Turret, 0.001Lux/F1.0, 0 Lux with white Light, 20m, 2D DNR, Built-in Mic, Audio up Coaxial (Only TVI), 12 VDC, OSD Menu (Up the Coax), 3.6mm Lens, 24H Color
- Support TVI/AHD/CVI/CVBS video signal output

Turbo HD 5MP & 8MP



DS-2CE16H0T-ITPF(S)

- 5MP@20fps, 4MP@25fps(P)/30fps(N), EXIR, 25m IR,
- Outdoor EXIR Bullet, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, DNR, Built-in Mic, Audio up Coaxial(Only TVI), OSD Menu(Up the Coax), IP67, 2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (S) : Audio



DS-2CE76H0T-ITPF(S)

- 5MP@20fps, 4MP@25fps(P)/30fps(N), EXIR, 20m IR,
- Outdoor EXIR Turret, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, DNR, Built-in Mic, Audio up Coaxial(Only TVI), OSD Menu(Up the Coax), 2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (S) : Audio



DS-2CE16U1T-ITPF

- 8.3MP @12.5fps(Default), 5MP@20fps, 4MP@25fps(P) /30fps(N), 2MP@25fps(P) /30fps(N), EXIR, 30m IR,
- Outdoor EXIR Bullet , ICR, 0.01 Lux/F1.2, 12VDC, Smart IR, DNR, OSD Menu(Up the Coax), IP67, 2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE16U1T-IT1F

- 8.3MP @12.5fps(Default), 5MP@20fps, 4MP@25fps(P) /30fps(N), 2MP@25fps(P) /30fps(N), EXIR, 30m IR,
- Outdoor EXIR Bullet , ICR, 0.01 Lux/F1.2, 12VDC, Smart IR, DNR, OSD Menu(Up the Coax), IP67, 2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE57U1T-VPITF

- 8.3MP @12.5fps(Default), 5MP@20fps, 4MP@25fps(P) /30fps(N), 2MP@25fps(P) /30fps(N), EXIR, 30m IR,
- Outdoor Vandal Proof Dome, ICR, 0.01 Lux/F1.2, 12VDC, Smart IR, DNR, OSD Menu(Up the Coax), IP67, 3.6/6/8/12mm Lens
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE76U1T-ITMF

- 8.3MP @12.5fps(Default), 5MP@20fps, 4MP@25fps(P) /30fps(N), 2MP@25fps(P) /30fps(N), EXIR, 30m IR,
- Outdoor EXIR Turret, ICR, 0.01 Lux/F1.2, 12VDC, Smart IR, DNR, OSD Menu(Up the Coax), IP67, 2.8/3.6/6mm Lens
- Support TVI/AHD/CVI /CVBS video signal output

DVR Series

TURBO HD



DS-7204HQHI-K1/E

- 4 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 4-ch HDTV I coaxial video&audio input, 1-ch RCA audio input, 2-ch IP video input(up to 6-ch IP),
- H.265/H.265+ compression, 1 SATA interface,CH01: 3MP @ 15fps, CH01-04:1920×1080P @15 fps, 4MP Lite@15fps/ch,260 1U case



DS-7208HQHI-K1/E

- 8 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 8-ch HDTV I coaxial video&audio input, 1-ch RCA audio input, 4-ch IP video input(up to 12-ch IP),
- H.265/H.265+ compression, 1 SATA interface,CH01 & 02: 3MP @ 15fps, C



DS-7216HQHI-K1/E

- 16 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 16-ch HDTV I coaxial video&audio input, 1-ch RCA audio input, 8-ch IP video input(up to 24-ch IP),
- H.265/H.265+ compression, 1 SATA interface,CH01-04: 3MP @ 15fps, CH01-16:1920×1080P @15 fps, 4MP Lite@15fps/ch, 4K UHD output, 260 1U case



DS-7232HQHI-K2

- 32 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 32-ch video&1-ch audio input, 8-ch IP video input(up to 40-ch IP),
- H.265/H.265+ compression, 2 SATA interfaces, CH01-04: 3MP @15fps, CH01-32:1920×1080P @15 fps, 4MP Lite @15 fps/ch, 4K UHD output, support CVBS output, 380 1U case



DS-7204HUHI-K1/E

- 4 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 4-ch HDTV I coaxial video&audio input, 1-ch RCA audio input, 4-ch IP video input(up to 8-ch IP), 1 SATA interface,
- H.265/H.265+ compression, 5MP: 12fps, 4MP: 15fps, 3MP: 18fps, 1920×1080P: 25(P)/30(N) fps/ch, 260 1U case



DS-7208HUHI-K1/E

- 8 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input,8-ch HDTV I coaxial video&audio input, 1-ch RCA audio input, 8-ch IP video input(up to 16-ch IP), 1 SATA interface,
- H.265/H.265+ compression, 8MP: 8fps, 5MP: 12fps, 4MP: 15fps, 3MP: 18fps, 1920×1080P: 25(P)/30(N) fps/ch, 4K UHD output, 260 1U case



IDS-7216HUHI-M2/S

- 16-ch Motion Detection 2.0 or 4-ch false alarm filter, 16 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 2 SATA interfaces,
- H.265/H.265+ compression, 8MP: 8fps, 5MP: 12fps, 4MP: 15fps, 3MP: 18fps, 1920×1080P: 25(P)/30(N) fps/ch, 4K UHD output, support CVBS output, 380 1U case



DS-7304HQHI-K4

- 4 Turbo HD/CVI / AHD / CVBS interface input, 4-ch video&4-ch audio input, 2-ch IP video input(up to 6-ch IP), H.264/H.264+/H.265+/H.265 video compression, 1 SATA interface,
- CH01: 3MP @ 15fps, CH01-04:1920×1080P @15 fps, 4MP Lite @ 15fps/ch,Extended transmission distance over coax cable, 4K UHD output, standalone 1U case



DS-7308HQHI-K4

- 8 Turbo HD/CVI / AHD / CVBS interface input, 8-ch video&4-ch audio input, 2-ch IP video input(up to 10-ch IP), H.264/H.264+/H.265+/H.265 video compression, 1 SATA interface,
- CH01-02: 3MP @ 15fps, CH0108:1920×1080P @15 fps, 4MP Lite @ 15fps/ch,Extended transmission distance over coax cable, 4K UHD output, standalone 1U case



DS-7316HQHI-K4

- 16 Turbo HD/CVI / AHD / CVBS interface input, 16-ch video&4-ch audio input, 2-ch IP video input(up to 18-ch IP), H.264/H.264+/H.265+/H.265 video compression, 1 SATA interface,
- CH01-04: 3MP @ 15fps, CH01 16:1920×1080P @15 fps, 4MP Lite @ 15fps/ch,Extended transmission distance over coax cable, 4K UHD output, standalone 1U case



DS-7332HQHI-K4

- 32 Turbo HD/CVI / AHD / CVBS interface input, 32-ch video&4-ch audio input, 16-ch IP video input(up to 48-ch IP), H.264/H.264+/H.265+/H.265 video compression, 4 SATA interface,
- CH01-04: 3MP @ 15fps, CH0132:1920×1080P @15 fps,4MP Lite @ 15fps/ch,Extended transmission distance over coax cable, 4K UHD output, 1.5U 19" case

Motion 2.0

Kecerdasan + Kemudahan
 Teknologi AcuSense menyaring alarm palsu & fokus pada sumber kejadian yang berkaitan manusia dan kendaraan. **Sekarang tersedia dengan deteksi gerakan untuk semua channel analog!**



Fokus

Berkonsentrasi pada peristiwa manusia dan kendaraan



Mudah digunakan

Motion 2.0 AKTIF secara default, jadi tidak perlu konfigurasi lebih lanjut



Efisien

Pencarian target cepat untuk manusia atau kendaraan



iDS-7204HQHI-M1/S

- 1-ch face detection or 2-ch false alarm filter
- 4 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 4-ch video&1-ch audio input
- H.265/H.265+ compression,
- 1 SATA interface,CH01: 3MP @ 15fps, CH01-04:1920×1080P @15 fps, 4MP Lite@15fps/ch, support CVBS output,
- standalone 1U case



iDS-7208HQHI-M1/S

- 1-ch face detection or 4-ch false alarm filter, 8 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 8-ch video&1-ch audio input
- H.265/H.265+ compression,
- 1 SATA interface,CH01 & 02: 3MP @ 15fps, CH01-08:1920×1080P @15 fps, 4MP Lite@15fps/ch, support CVBS output
- Standalone 1U case



iDS-7216HQHI-M1/S

- 1-ch face detection or 4-ch false alarm filter, 16 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 16-ch video&1-ch audio input
- H.265/H.265+ compression
- 1 SATA interface,CH01-04: 3MP @ 15fps, CH01-16:1920×1080P @15 fps, 4MP Lite@15fps/ch, 4K UHD output support CVBS output,
- standalone 1U case



iDS-7204HUHI-M1/S

- 1-ch face detection or 4-ch false alarm filter
- 4 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 4-ch video&1-ch audio input,
- 1 SATA interface,
- H.265/H.265+ compression, 5MP: 12fps, 4MP: 15fps, 3MP: 18fps, 1920×1080P: 25(P)/30(N) fps/ch, support CVBS output,
- standalone 1U case



iDS-7204HUHI-M1/S

- 1-ch face detection or 4-ch false alarm filter,
- 4 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 4-ch video&1-ch audio input,
- 1 SATA interface, H.265/H.265+ compression, 5MP: 12fps, 4MP: 15fps, 3MP: 18fps, 1920×1080P: 25(P)/30(N) fps/ch, support CVBS output
- standalone 1U case



iDS-7208HUHI-M1/S

- 1-ch face detection or 4-ch false alarm filter,
- 8 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 8-ch video&1-ch audio input,
- 1 SATA interface, H.265/H.265+ compression, 8MP: 8fps, 5MP: 12fps, 4MP: 15fps, 3MP: 18fps, 1920×1080P: 25(P)/30(N) fps/ch, 4K UHD output, support CVBS output,
- standalone 1U case



iDS-7204HUHI-M2/S

- 1-ch face detection or 4-ch false alarm filter,
- 4 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 4-ch video&1-ch audio input,
- 2 SATA interfaces, H.265/H.265+ compression, 5MP: 12fps, 4MP: 15fps, 3MP: 18fps, 1920×1080P:25(P)/30(N) fps/ch, support CVBS output,
- 380 1U case



iDS-7208HQHI-M2/S

- 1-ch face detection or 4-ch false alarm filter, 8 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 8-ch video&1-ch audio input,
- H.265/H.265+ compression, 2 SATA interfaces, CH01 & 02: 3MP @ 15fps, CH01-08:1920×1080P @15 fps, 4MP Lite@15fps/ch, support CVBS output, 380 1U case



iDS-7216HQHI-M2/S

- 1-ch face detection or 4-ch false alarm filter, 16 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 16-ch video&1-ch audio input,
- H.265/H.265+ compression, 2 SATA interfaces, CH01-04: 3MP @ 15fps, CH01-16:1920×1080P @15 fps, 4MP Lite@15fps/ch, 4K UHD output, support CVBS output, 380 1U case

IK10



DS-2CD1043G0E-I 4MP

DS-2CD1023G0E 2MP

- 1/2.8" Progressive CMOS, ICR, 1920x1080: 25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC, IR range: up to 30m, DC12V & PoE,
- Build-in microphone & SD Card Slot (up to 256GB),
- Support mobile monitoring via Hik-Connect



DS-2CD1143G0E-I 4MP

DS-2CD1123G0E 2MP

- 1/2.8" Progressive CMOS, ICR, 1920x1080: 25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC, IR range: up to 30m, DC12V & PoE,
- Build-in microphone & SD Card Slot (up to 256GB),
- Support mobile monitoring via Hik-Connect



DS-2CD1343G0E-I 4MP

DS-2CD1323G0E 2MP

- 1/2.8" Progressive CMOS, ICR, 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC, IR range: up to 30m, DC12V & PoE,
- Build-in microphone & SD Card Slot (up to 256GB),
- Support mobile monitoring via Hik-Connect



DS-2CD1021-I 2MP

- 1/2.8" Progressive CMOS, ICR, 1920x1080 : 25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, 3D DNR, BLC, up to 30m warm light,
- F1.0, DC12V & PoE,
- Support mobile monitoring via Hik-Connect



DS-2CD1123G0-IUF

- 1/2.8" Progressive CMOS, ICR, 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC, IR range: up to 30m, DC12V & PoE,
- Build-in microphone & SD Card Slot (up to 256GB),
- Support mobile monitoring via Hik-Connect



DS-2CD1323G0-IUF

- 1/2.8" Progressive CMOS, ICR, 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC, IR range: up to 30m, DC12V & PoE,
- Build-in microphone & SD Card Slot (up to 256GB),
- Support mobile monitoring via Hik-Connect

KAMERA IP SERI 1


DS-2CD1027GO-L(UF)


- 1/2.8" Progressive CMOS, ICR, 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, 3D DNR, BLC, up to 30m warm light, F1.0, DC12V & PoE,
- Support mobile monitoring via Hik-Connect


DS-2CD1047GO-L(UF)
4MP


- 1/2.7" Progressive CMOS, ICR, 2560x1440:20fps,
- H.265+/H.265/H.264+&H.264, 3D DNR, BLC, up to 30m warm light, F1.0, DC12V & PoE,
- Support mobile monitoring via Hik-Connect. Built-in Microphone and MicroSD Card Slot (up to 256GB)


DS-2CD1327GO-L(UF)

- 1/2.8" Progressive CMOS, ICR, 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, 3D DNR, BLC, up to 30m warm light, F1.0, DC12V & PoE,
- Support mobile monitoring via Hik-Connect


DS-2CD1347GO-L(UF)

- 1/2.7" Progressive CMOS, ICR, 2560x1440:20fps,
- H.265+/H.265/H.264+&H.264, 3D DNR, BLC, up to 30m warm light, F1.0, DC12V & PoE,
- Support mobile monitoring via Hik-Connect


DS-2CD1127GO(-UF)

- 1/2.8" Progressive CMOS, ICR, 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, 3D DNR, BLC, F1.0, DC12V & PoE,
- Support mobile monitoring via Hik-Connect


DS-2CD1147GO(-UF)

- 1/2.7" Progressive CMOS, ICR, 2560x1440:20fps,
- H.265+/H.265/H.264+&H.264, 3D DNR, BLC, F1.0, DC12V & PoE,
- Support mobile monitoring via Hik-Connect


DS-2CD1T27GO-L(UF)


- 1/2.8" Progressive CMOS, ICR, 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, 3D DNR, BLC, up to 50m warm light, F1.0, DC12V & PoE,
- Support mobile monitoring via Hik-Connect


DS-2CD1T47GO-L(UF)

- 1/2.7" Progressive CMOS, ICR, 2560x1440:20fps,
- H.265+/H.265/H.264+&H.264, 3D DNR, BLC, up to 50m warm light, F1.0, DC12V & PoE,
- Support mobile monitoring via Hik-Connect

HIKVISION®

See Far Go Further

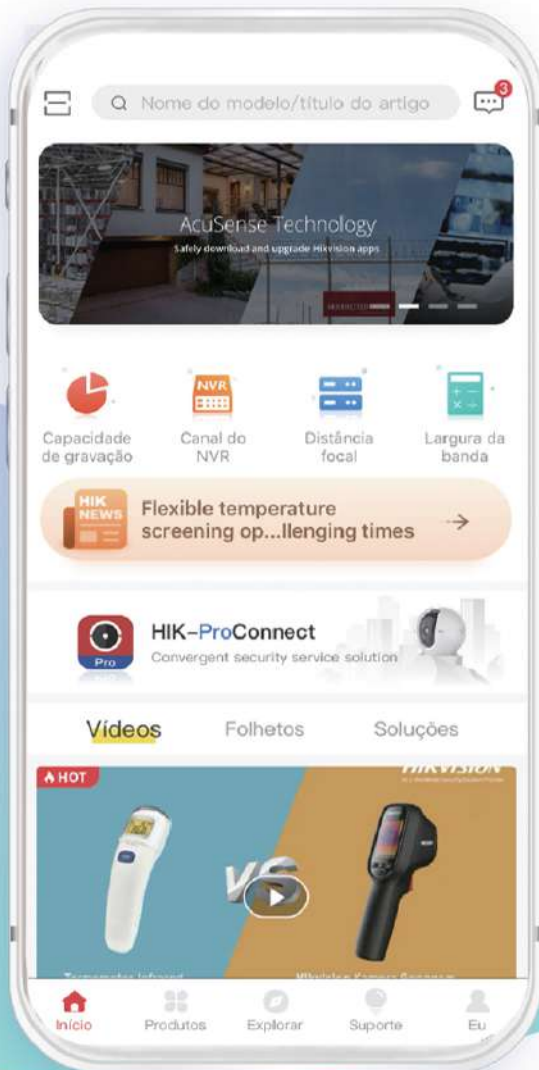

Hik-ePartner


App Konfigurasi yang Tangkas untuk Member Installer

Pemilih produk yang tangkas.

Instalasi mudah dengan video dan panduan manual.

Promosi penjualan yang terbaru dilengkapi notifikasi.

Bergabunglah di Program Loyalti Installer kami.

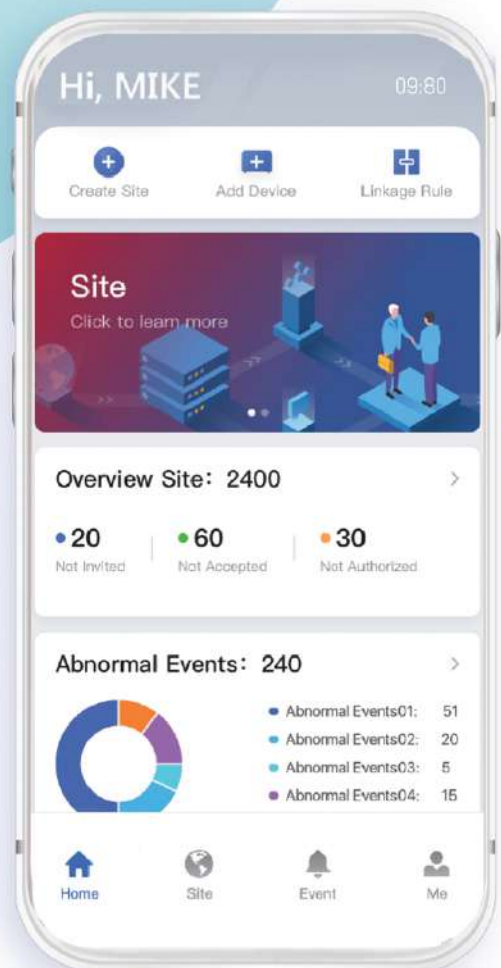

Hik- Pro Connect

Bantu User Dari Mana Saja khusus Installer Profesional

Dapat melakukan pemeliharaan dari jarak jauh
Pemantauan status secara aktif dan pelayanan
untuk meningkatkan efisiensi Anda.

Pengelolaan terpadu secara terpusat
dan video verifikasi instan.

Perluas bisnis Anda dengan skema berlangganan
untuk keuntungan maksimal

Kamera IP Seri 2



DS-2CD2021GO 2MP

- 1/2.8" Progressive CMOS, ICR, Olux with IR, 1920x1080:25fps(P)/30fps(N)
- H.265+/H.265/H.264/MJPEG
- DC12V & PoE, 3D DNR, BLC
- Line crossing detection, Intrusion detection
- IR range: up to 30m, HIK-Connect cloud service



DS-2CD2121GO 2MP

- 1/2.8" Progressive CMOS, ICR, Olux with IR, 1920x1080:25fps(P)/30fps(N)
- H.265+/H.265/H.264/MJPEG, DC12V & PoE, 3D DNR, BLC
- Line crossing detection, Intrusion detection . IR range: up to 30m, Support on-board storage (SD card not included), HIK-Connect cloud service
- S: Audio/Alarm IO connectors



DS-2CD2321GO 2MP

- 1/2.8" Progressive CMOS, ICR, Olux with IR, 1920x1080:25fps(P)/30fps(N)
- H.265+/H.265/H.264/MJPEG, DC12V & PoE, 3D DNR, BLC
- Line crossing detection, Intrusion detection
- IR range: up to 30m,
- HIK-Connect cloud service



DS-2CD2621GO-I 2MP

DS-2CD2621GO-IS 2MP

- 1/2.8" Progressive CMOS, ICR, 0 lux with IR, 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264/MJPEG, DC12V & PoE, 3D DNR, BLC
- Line crossing detection, Intrusion detection . IR: up to 30m,
- on-board card slot (SD card not included), HIK-Connect cloud service

DS-2CD2621GO-IZ 2MP

DS-2CD2621GO-IZS 2MP

AcuSense

Technology

The Easy Upgrade

to

AI



**FOCUS
and
ACT**

Alarm Lebih Kuat

Playback Lebih Efisien



AcuSense
Technology

DS-2CD2063G2 6MP

DS-2CD2043G2-I 4MP

DS-2CD2023G2-I 2MP

- Teknologi video kompresi efisien H.265+
- DWDR, ICR, 3D DNR, BLC/HLC, EXIR
- Jarak IR sampai 40m, IP67
- Warna: 0.005 Lux @ (F1.6, AGC ON)
- 2.8/4/6 mm fixed lensa
- Line crossing detection, Intrusion detection
- Built-in micro SD/SDHC/SDXC slot



AcuSense
Technology



DS-2CD2163G2 6MP

DS-2CD2143G2-I(S) 4MP

DS-2CD2123G2-I(S) 2MP

- Teknologi video kompresi efisien H.265+
- DWDR, ICR, 3D DNR, BLC/HLC, EXIR 2.0
- Jarak IR sampai 30m, IP67
- Warna: 0.005 Lux @ (F1.6, AGC ON)
- 2.8/4 mm fixed lensa
- Line crossing detection, Intrusion detection
- Built-in micro SD/SDHC/SDXC slot
- S model: Audio/Alarm IO



AcuSense
Technology

DS-2CD2363G2 6MP

DS-2CD2343G2-I 4MP

DS-2CD2323G2-I 2MP

- 1/2.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR; 25fps/30fps(1920x1080); VCA functions; 3 streams;
- 3D DNR; BLC/HLC; ICR; EXIR, up to 30m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service



AcuSense
Technology



DS-2CD2T63G2 6MP

DS-2CD2T43G2 4MP

DS-2CD2T23G2 2MP

- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR; 25fps/30fps(1920x1080);
- VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service

EASY IP 4.0

Darkfighter



AcuSense
Technology

DS-2CD2086G2 8MP

DS-2CD2046G2 4MP

DS-2CD2T26G2-2I/4I 2MP

- Live Guard Cameras
- Teknologi video kompresi efisien H.265+
- DWDR, ICR, 3D DNR, BLC/HLC, EXIR 2.0
- Warna: 0.003 Lux, DS-2CD2026G2-I(U) 0.002 Lux
- 2.8/4/6mm fixed lensa, IP67
- Line crossing detection, Intrusion detection, Region entrance, Region exiting, Human / vehicle classification alarm Built-in mic&speaker
- Built-in micro SD/SDHC/SDXC slot



AcuSense
Technology

DS-2CD2186G2 8MP

DS-2CD2146G2 4MP

DS-2CD2126G2 2MP

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Powered by Darkfighter technology, Color: 0.003 lux @(F1.6, AGC ON), 0 lux with IR;
- VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 30m; DC12V&PoE
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- SU model: Audio/Alarm I/O, Built-in microphone



AcuSense
Technology

DS-2CD2386G2 8MP

DS-2CD2346G2 4MP

DS-2CD2326G2 2MP

- 1/2.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Powered by Darkfighter technology, Color: 0.002 lux @(F1.4, AGC ON), 0 lux with IR;
- 25fps/30fps(1920×1080); VCA functions; 3 streams; 3D DNR; BLC; ICR; EXIR; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service
- U model: Built-in microphone



AcuSense
Technology

DS-2CD2T46G2 4MP

DS-2CD2T47G2 4MP

DS-2CD2T26G2 2MP

- Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Powered by Darkfighter technology, Color: 0.002 lux @(F1.4, AGC ON), 0 lux with IR;
- 25fps/30fps(1920×1080); VCA functions; 3 streams; 3D DNR; BLC; ICR; EXIR; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service
- 2I/4I model: up to 50m(2Leds)/80m(4Leds) IR distance



AcuSense
Technology

DS-2CD2546G2 4MP

DS-2CD2526G2 2MP

- Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG
- Powered by Darkfighter technology, Color: 0.002 lux @(F1.4, AGC ON), 0 lux with IR
- 25fps/30fps(1920×1080); VCA functions; 3 streams; 3D DNR; BLC; ICR; EXIR; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service Built-in microphone
- S model: Audio/Alarm I/O



AcuSense
Technology

DS-2CD2686G2 8MP

DS-2CD2646G2 4MP

DS-2CD2626G2 2MP

- Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Powered by Darkfighter technology, Color: 0.002 lux @(F1.4, AGC ON), 0 lux with IR;
- 25fps/30fps(1920×1080); VCA functions; 3 streams; 3D DNR; BLC; ICR; EXIR; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Audio/Alarm I/O



DS-2CD2463G0 6MP

DS-2CD2443G0 4MP

DS-2CD2423G0 2MP

- Teknologi video kompresi efisien H.265+
- DWDR, ICR, 3D DNR, BLC/HLC, EXIR 2.0
- Warna: 0.018 Lux @ (F1.6, AGC ON)
- 2.8 mm fixed lensa
- Line crossing detection, Intrusion detection
- Built-in mic&speaker
- Built-in micro SD/SDHC/SDXC slot



DS-2CD2185G0-IMS 8MP

DS-2CD2165G0-I(S) 6MP

- Teknologi video kompresi efisien H.265+
- DWDR, ICR, 3D DNR, BLC/HLC, EXIR 2.0
- Jarak IR sampai 30m, IP 67, IK10
- Warna: 0.028 Lux @ (F2.0, AGC ON)
- 2.8/4 mm fixed lensa
- Line crossing detection, Intrusion de tecton, Unattended baggage detection, Object removal detection, Face detection, Scene change detection
- Built-in micro SD/SDHC/SDXC slot
- Built-in Audio/Alarm I/O



DS-2CD2365G1 6MP

- 1/2.4" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG
- Powered by Darkfighter technology, Color: 0.016 lux@(F1.6, AGC ON),
- VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 30m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service



DS-2CD2T65G1 6MP

- 1/2.4" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Powered by Darkfighter technology, Color: 0.016 lux@(F1.6, AGC ON), 0 lux with IR;
- VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR; DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service
- up to 50m(2Leds)/80m(4Leds) IR distance



DS-2CD2955FWD 5MP

DS-2CD2935FWD 2MP

- Teknologi video kompresi efisien H.265+
- DWDR, ICR, 3D DNR, BLC/HLC, EXIR 2.0
- Warna: 0.01 Lux @ (F1.2, AGC ON)
- 1.16mm fisheye lensa
- Line crossing detection, Intrusion de tecton, Unattended baggage detection, Object removal detection, Face detection
- Jarak IR sampai 20m, IR Panoramic



DS-2CD2345G0P 4MP

- Teknologi video kompresi efisien H.265+
- DWDR, ICR, 3D DNR, BLC/HLC, EXIR 2.0
- Warna: 0.028 Lux @ (F2.0, AGC ON)
- 1.68 mm ultra wide angle fixed lensa
- Line crossing detection, Intrusion detection, Unattended baggage detection, Object removal detection, Face detection, Scene change detection
- Jarak IR sampai 10m



DS-2CD2T45G0P 4MP

- 1/2.7" Progressive Scan CMOS;
- H.265+/H.265/H.264+/H.264/MJPEG
- 1.68 mm ultra wide angle fixed lens



PTZ

Camera



DS-2DE3404 4MP

DS-2DE3204 2MP

- High quality imaging with 4 MP resolution
- Clear imaging against strong back lighting due to 120 dB WDR technology
- Pan and tilt ability enables camera to monitor zones of interest
- 4 x optical zoom allows for closer viewing of subjects in expansive areas



DS-2DE3A404IW 4MP

- 4MP H.265+/H.265;4x optical zoom;120 dB WDR;12VDC & PoE;Powered by DarkFighter;IP66
- Up to 50 m IR distance
- Built-in speaker and microphone for audible warning and two-way audio
- White light flashing when alarm triggers



IP66

DS-2DE3A400BW 4MP

- Accurate human and vehicle target classification and alarm, based on deep learning algorithm
- Support face capture. Up to 5 faces captured at the same time
- Built-in speaker and microphone for audible warning and two-way audio;White light flashing alarm triggers



DS-2DE2A404IW (NEW) 4MP

- 1/3"CMOS,H.265+,3D DNR, ICR, Color:0.005lux/F1.6, B/W:0.001lux/F1.6,
- 4x optical zoom, Angle of View: 100° to 33° (Wide-Tele),
- Digital Zoom:16X, 2560 × 1440:30fps,
- Pan range:0°~330°; Tilt range: 0°~90°(Auto Flip), Pan Speed: 0.1° -100°/s, Tilt Speed: 0.1° -100°/s, 20m IR, POE&12VDC



DS-2DE4425IW (NEW) 4MP

DS-2DE4225IW 2MP

DS-2DE4215IW 2MP

- Ultra-low light Powered By DarkFighter Color: 0.005lux/F1.6, B/W:0.001lux/F1.6,
- Optical Zoom:25x/15x, Digital Zoom:16X, 100m IR
- 2560*1440:30fps, Pan Speed: 0.1° -80°/s, Tilt Speed: 0.1° -80°/s, PoE+&12VDC Smart Detection



DS-2DE4A425IW (NEW) 4MP

DS-2DE4A225IW (NEW) 2MP

- CMOS,H.265+/H.265/H.264+/H.264 codec,WDR, 3D DNR, ICR, Ultra-low light Powered By DarkFighter Color: 0.005lux/F1.6, B/W:0.001lux/F1.6,
- Optical Zoom:25x, Focus:4.8-120mm, Digital Zoom:16X, 2560*1440:30fps,
- Pan Speed: 0.1° -300°/s, Tilt Speed: 0.1° 160°/s, PoE+&12VDC
- Smart Tracking Smart Detection

NVR Series

HIKVISION®



DS-7104NI-Q1/M 40Mbps

DS-7104NI-Q1/4P/M 40Mbps

DS-7108NI-Q1/8P/M 60Mbps

DS-7108NI-Q1/M 60Mbps

- 60Mbps Bit Rate Input Max (up to 4-ch IP video)
- 1 SATA interface, mini 1U case up to 6TB per HDD
- 2-ch 1080P, or 1-ch 7M max



DS-7604NI-Q1/4P 40Mbps

DS-7608NI-Q2/8P 80Mbps

DS-7616NI-Q2/16P 160Mbps

- 160Mbps Bit Rate Input Max (up to 16-ch IP video), 2 SATA interfaces, 380 1U case, alarm I/O: 4/1
- Up to 300 meters POE ports



DS-7608NI-I2 80Mbps

DS-7616NI-I2/16P 160Mbps

- 160Mbps Bit Rate Input Max (up to 16-ch IP video),
- 2 SATA Interfaces, 16 independent PoE network interfaces, alarm I/O: 4/1, 380 1U case



DS-7716NI-K4 160Mbps

DS-7732NI-K4/16P 256Mbps

- 160Mbps Bit Rate Input Max (up to 16-ch IP video), 2 SATA Interfaces
- 16 independent PoE network interfaces, alarm I/O: 4/1, 380 1U case



DS-7716NI-K4 160Mbps

DS-7732NI-K4/16P 256Mbps

- 256Mbps Bit Rate Input Max (up to 32-ch IP video), 4 SATA Interfaces
- 16 independent PoE network interfaces, alarm I/O: 16/4, 1.5U case, 19"
- up to 4K HDMI input



DS-7716NI-I4 160Mbps

DS-7732NI-I4/16P 256Mbps

DS-7732NI-I4/24P 320Mbps

- 320Mbps Bit Rate Input Max (up to 32-ch IP video), 4 SATA Interfaces, 2 HDMI outputs
- 1 VGA port, 1 CVBS output, 1 eSATA, 24 independent PoE network interfaces, alarm I/O: 16/4, 1.5U case, 19"



DS-7716NXI-I4/S

DS-7716NXI-I4/16P/S

DS-7732NXI-I4/S

DS-7732NXI-I4/16P/S

- False alarm reduction for up to 4-ch 1080P max;
- Facial Recognition for up to 4 channels picture stream or 1 channels video stream;
- Support 16 face libraries, up to 10,000 face pictures in total;
- 256Mbps Bit Rate Input Max (up to 16-ch IP video), 4 SATA Interfaces, 2 HDMI outputs, 1 VGA port, 1 CVBS output, 1eSATA, alarm I/O: 16/4, 1.5U case, 19"

PoE Switch yang Kuat

Manajemen PoE Cerdas

Transmisi Jarak Jauh

Hingga **300m** untuk Transmisi PoE

Standar BT Hi-PoE

Maksimum **60 Watt** untuk satu port (didukung oleh model tertentu saja)

Lebih Sedikit Kehilangan Daya

4 Atau 8 core dari catuan daya adaptif

Tingkat Kehandalan

Pelindungan induksi listrik **6KV**

Desain untuk Transmisi Video

Transmisi data yang lancar untuk port VIP dalam semua keadaan



DS-3E1105P-EI (NEW)

DS-3E1309P-EI (NEW)

DS-3E1318P-EI (NEW)

DS-3E1326P-EI (NEW)

- L2, Smart Managed, 24 10/100M RJ45 PoE ports, 2 Gigabit combo ports,
- 802.3af/at, PoE power budget 370W, Max. 300 meter PoE transmission
- Supports Hik-Central/iVMS 4200/Hik-Pro Connect Unified Topology Management, cloud management, health monitor



DS-3E0508-E (NEW)

DS-3E0505-E (NEW)

- 5 Gigabit RJ45 ports, Desktop Steel Case Unmanaged Switch
- L2, Unmanaged, 8 Gigabit RJ45 ports, Back plane bandwidth: 16Gbps



DS-3E0505D-E

DS-3E0508D-E

DS-3E0105D-E

- L2, Unmanaged, 5 Gigabit RJ45 ports, desktop plastic switch
- L2, Unmanaged, 8 Gigabit RJ45 ports, desktop plastic switch
- L2, Unmanaged, 5 10/100M RJ45 ports, desktop plastic switch
- L2, Unmanaged, 8 10/100M RJ45 ports, desktop plastic switch



DS-3E0318P-E/M

DS-3E0326P-E/M

- L2, Unmanaged, 24 10/100M RJ45 PoE ports, 1 Gigabit RJ45 uplink port, 1 Gigabit SFP uplink port, 802.3af/at
- PoE power budget 230W, "Extend" Mode: ports 17-24 support up to 250meter, 6KV surge protection



DS-3E0310HP-E (New)

DS-3E0106HP-E (New)

DS-3E0105P-E

- L2, Unmanaged, 8 10/100M RJ45 PoE ports
- 2 Gigabit RJ45 uplink ports, 802.3af/at/bt, port 1 support HiPoE 60w
- PoE power budget 110W, max. 250m long distance transmission, 6KV surge protection



DS-3E0505P-E/M

DS-3E0510P-E/M

- L2, Unmanaged, 8 Gigabit POE ports
- 1 Gigabit RJ45 uplink port, 1 Gigabit SFP uplink port, 802.3af/at
- PoE power budget 58w

Hikvision Kabel Jaringan Pilihan Pertama, Selamanya Terpercaya

Pilihan untuk

Sistem CCTV

99.95%
Kemurnian Cu



Konduktivitas yang lebih tinggi
dengan redaman transmisi
sinyal yang lebih rendah

0.565 mm
Diameter Kawat



Transmisi sekarang lebih
stabil dengan resistensi
yang berkurang

Bahan tebal tahan terhadap api,
peregangan, dan penuaan

Lapisan
tahan Api



Peningkatan kemudahan
aliran ke data transmisi

Teknologi memutar
yang tepat



DS-1LN5E-E/E

- UTP CAT 5E, 305 meters,
- Core diameter: 0.45mm
- OFC,CMX ,gray



DS-1LN6U-G

DS-1LN6U-W/CCA

- UTP CAT 6, 305 meters
- Core diameter: 0.585mm,CCA,white
- Core diameter: 0.55mm Solid Copper, gray

NON-CCTV PRODUCTS

ACCESS CONTROL, VIDEO INTERCOM, SECURITY ALARM AND INTELLIGENT SECURITY INSPECTION



DS-KIS702

- IP video intercom kit for villa or house, only one call button.
- DS-KD8003-IME2/Surface x 1;
- DS-KH6320-WTE2 x 1;
- DS-KAD704 x 1;
- DS-KAW30-2N x 1;
- 16GB TF card x1;
- No need additional power supply



DS-KIS202 (NEW)

- Analog Kit
- Kit including DS-KB2411-IM and DS-KH2220
- Include one monitor, one outdoor panel, 5-meter 4-wire cable, and other accessories
- you have to mark which standard adapter you want when you place an order



DS-KIS203(NEW)

- Water Proof Analog Kit
- Kit including DS-KB2421IM and DS-KH2220
- Include one monitor, one metal outdoor panel, 5-meter 4-wire cable, and other accessories
- you have to mark which standard adapter you want when you place an order



DS-KIS604-P

- IP video intercom kit for villa or house, only one call button.
- DS-KV8113-WME1 x1;
- DS-KH6320-WTE1 x1;
- 4 port standard PoE switch x1; (for KIS604-S)
- PSU x2;(for KIS604-P)
- 16GB TF card x1;
- No need additional power supply, but you have to mark which standard of power line type of the PoE switch you want when you place an order.(for KIS604-S)
- It includes 2 European power adapters, if you want to change the standard of power supply, you have to mark which standard of power adapter you want when you place an order.(for KIS604-P)



DS-K1T331

- Face Recognition Access Control Terminal, 3.97-inch LCD touch screen, 2 Mega pixel wide-angle lens;
- Max.300 faces capacity;
- Supports TCP/IP,communication,DC 12V/2A
- Application Situation: Indoor
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out

DS-K1T342MX, DS-K1T342MFX

- Max.1500 faces capacity, and Max.3000 cards
- Face Recognition Terminal, 4.3-inch LCD touch screen, 2 Mega pixel wide-angle lens, built-in Mifare/Felica/DESfire card reading module
- Two-way audio with client software, indoor station, and main station; Supports TCP/IP
- Supports ISAPI, ISUP5.0
- Configuration via the web client
- Face Recognition Distance: 0.3 m to 1.5 m
- Duration, 0.2 s/User, Accuracy rate \geq 99%
- Supports mask recognition



DS-K1T8003MF

- 2.4-inch LCD Display Fingerprint Access Control Terminal, Built-in Mifare card reading module, Communication: TCP/IP, EHome;
- 1000 users, 1000 fingerprints, 1000 card and Max. 100,000 event records;
- Support Access Control and Time Attendance Function, Optical Fingerprint Module;
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- Remotely opens door via Hik-Connect mobile client, Tamper alarm.
- Color & Silver



DS-K1T804AEF

- Integrated management of access control and the attendance
- ISUP5.0 address settings on device, ISAPI
- Remotely opens door via Hik-Connect mobile client
- 2.4-inch LCD screen to display the time, the date and swiping/fingerprint authentication results
- Remotely adds fingerprints to the system
- Max. 3000 users, Max. 3000 fingerprints and Max. 100,000 event recables
- Different authentication types can be configured according to different situations
- Stand-alone operation locally adds person, card and fingerprint information
- Exports the swiping card data and the attendance report to the USB flash drive
- Supports fingerprint card reader (DS-K1201 series) accessing



DS-K1T341AMF

- Face Recognition Terminal, 4.3-inch LCD touch screen, 2 Mega pixel wide-angle lens, Built-in Mifare card reading module;
- Max.1500 faces capacity and Max.1500 fingerprints capacity, Max.1500 cards;
- Face recognition in dark environment
- Two-way audio with client software, indoor station, and master station
- Supports TCP/IP, DC 12V/3A
- Supports Ehome5.0, ISAPI
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- IP65
- Face Recognition Accuracy Rate > 99%
- Face Recognition Duration(1:N) \leq 0.2s
- Face Recognition Distance: 0.3m ~ 1.5m
- Fingerprint devices are recommended for using in indoor environment

Kecepatan Koneksi Lancar di Setiap Kesempatan

Router Nirkabel Hikvision

Memberikan pengalaman online yang paling cerdas & Berkecepatan tinggi



Antena 5-dBi

Antena omnidirectional yang sangat sensitif



Sinkronisasi Akun

Dapatkan akun broadband secara otomatis dari router sebelumnya



Dual Band

Auto switch antara sinyal 2,4 & 5 GHz



Manajemen yang Nyaman

Mendukung web dan Aplikasi Hik-Connect dengan fungsi yang luas



Beamforming

Sesuaikan bentuk gelombang ke balok agregat ke arah pengguna



MU-MIMO

Koneksi serentak dan lancar dengan lebih banyak perangkat



DS-3WR3N

- 5-dBi amplified antennas
- Dual antennas for maximum coverage
- Supports IPTV
- Data Rate: 2.4 GHz: 300 Mbps
- Antenna: Two 5-dBi amplified antennas
- Wireless Standard: IEEE 802.11b/g/n @ 2.4 GHz
- Working Frequency Band: 2.4 GHz



DS-3WR12C

- Four 5-dBi amplified antennas
- Beamforming optimizes signal
- Dual band – Smart signal switching
- Broadband account synchronization
- Data Rate: 5 GHz: 867 Mbps; 2.4 GHz: 300 Mbps
- Antenna: Four 5-dBi amplified antennas
- Wireless Standard: IEEE 802.11/a/n/ac wave 2 @ 5 GHz; IEEE 802.11b/g/n @ 2.4 GHz
- Working Frequency Band: 2.4 GHz, 5 GHz

HIKVISION®

KATALOG 2022

PT. HIKVISION TECHNOLOGY INDONESIA

Head Office

DKI Jakarta

APL Tower 22nd Floor Unit 8 & 9
Jl. Letjen S. Parman Kav. 28
Jakarta 11470
(021) 29339366

Branch Office

Medan

Forum Nine 7th Floor
Jl. Imam Bonjol No. 9
Medan Petisah, Medan
Sumatera Utara 20112
(061) 88815838

Surabaya

Pakuwon Center 16th Floor, Unit 11
Tunjungan Plaza Superblock
Jl. Embong Malang No. 1,3 & 5
Surabaya 60261
(031) 99250125

Service Center

DKI Jakarta

Jl. Mangga XVII No.9A
Duri Kepa, Kebon Jeruk, Greenville
Jakarta 11510
(+62) 812 2222 9728



Hik-ProConnect

Bantu User Anda Dari Mana Saja
Khusus Installer Professional

